


Key Specification

- Solid Structure design and high quality material, providing higher safety level.
- Uniform and gentle light with effective eye protection.
- The installation is very easy.
- The design is stable, reliable and not easily deformed.
- The plastic material used provide fast heat dissipation, making it durable and practical.
- Both dimmable and non-dimmable type available.
- Anti-glare design
- The deep seated glossy reflector with lens, results in high degree of uniform illumination and excellent glare control.


Light Distribution Curve

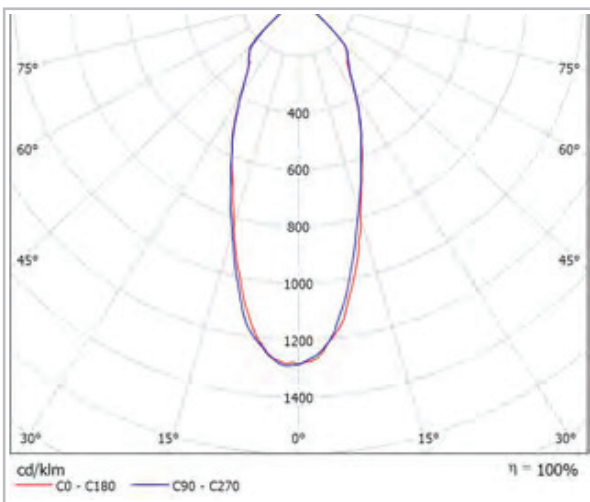

Key Attributes

Application	: Offices, Home interior, Museums, Shopping Malls.
Color Temperature available (CCT)	: 6500K, 4000K, 3000K
IP Rating	: IP40
Beam Angle (°)	: 24 Degree
Input Voltage (V)	: AC 220-240V
Frequency Range (Hz)	: 50-60 Hz
Working Temperature (°c)	: 0°c to +40°c
Lamp Luminous Efficiency (lm/w)	: 65 lm/w
Working Lifetime (Hour)	: 25000
Power Factor	: >0.5
CRI (Ra)	: >80
Power Wattages available	: 7W
Body Color	: White

Technical Drawing

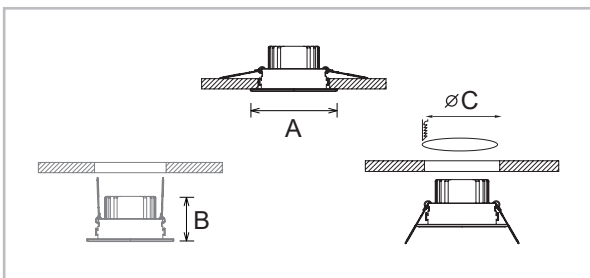

AVAILABLE VARIANTS

Product Code	Type	Wattage	CCT	Lumen Output	Dimensions Ax B (mm)	Hole Size C (mm)
LAUSP7RR65	Non-Dimmable	7W	6500K	450 lm	85X47 mm	75 mm
LAUSP7RR40	Non-Dimmable	7W	4000K	450 lm	85X47 mm	75 mm
LAUSP7RR30	Non-Dimmable	7W	3000K	450 lm	85X47 mm	75 mm