


Key Specification

- Adjustable 3 CCT in one spotlight.
- Uniform and gentle light with effective eye protection.
- The installation is very easy.
- The design is stable, reliable and not easily deformed.
- The plastic material used provide fast heat dissipation, making it durable and practical.
- Solid Structure design and high quality material, providing higher safety level.


Light Distribution Curve

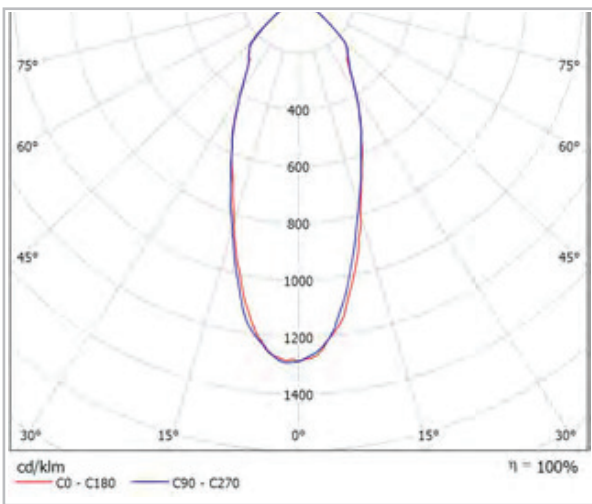

Key Attributes

- Application : Offices, Home interior, Museums, Shopping Malls.
- Color Temperature available (CCT) : 6500K, 4000K, 3000K
- IP Rating : IP40
- Beam Angle (°) : 38 Degree
- Input Voltage (V) : AC 220-240V
- Frequency Range (Hz) : 50-60 Hz
- Working Temperature (°c) : 0°c to +40°c
- Lamp Luminous Efficiency (lm/w) : 75 lm/w
- Working Lifetime (Hour) : 25000
- Power Factor : >0.7
- CRI (Ra) : >80
- Power Wattages available : 7W
- Body Color : White & Black

Technical Drawing

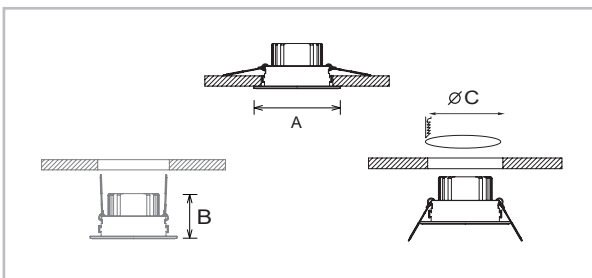

AVAILABLE VARIANTS

Product Code	Type	Wattage	CCT	Lumen Output	Dimensions AxB (mm)	Hole Size C (mm)
LISP7RRT-WH	Non-Dimmable	7W	3000K,4000K,6500K	450,480,480 lm	95X47 mm	75 mm
LISP7RRT-BK	Non-Dimmable	7W	3000K,4000K,6500K	450,480,480 lm	95X47 mm	75 mm