





Key Specification

- High quality LED Chip.
- Available in GU10 and GU5.3 models.
- Narrow beam angle LED suitable for showcase lighting.
- Delay and flicker free.
- Easy installation and highly energy efficient.
- Low light degradation over time.

Light Distribution Curve

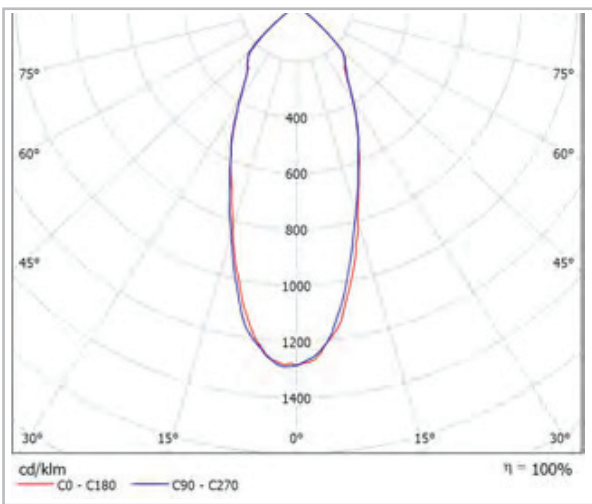

Technical Drawing

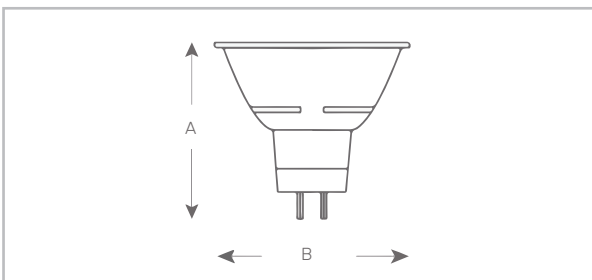

Key Attributes

- Application : Offices, Home interior, spot lighting, architectural lighting, Display case accent, Reading light, Biological Lighting.
- Color Temperature available (CCT) : 6500K, 4000K, 3000K
- IP Rating : IP40
- Beam Angle (°) : 38 Degree
- Input Voltage (V) : AC 220-240V
- Frequency Range (Hz) : 50-60 Hz
- Working Temperature (°c) : 0°c to +40°c
- Lamp Luminous Efficiency (lm/w) : 70 lm/w
- Available Models : GU10, GU5.3
- Working Lifetime (Hour) : 25000
- Power Factor : >0.5
- CRI (Ra) : >80
- Power Wattages available : 5W/7W
- Body Color : White

AVAILABLE VARIANTS

Product Code	Type	Wattage	CCT	Lumen Output	Dimensions AxB (mm)
LISB7G5330	GU5.3	7W	3000K	504 lm	50x55 mm
LISB7G5340	GU5.3	7W	4000K	504 lm	50x55 mm
LISB7G5365	GU5.3	7W	6500K	504 lm	50x55 mm
LISB5G5330	GU5.3	5W	3000K	400 lm	50x55 mm
LISB7G1030	GU10	7W	3000K	504 lm	50x55 mm
LISB7G1040	GU10	7W	4000K	504 lm	50x55 mm
LISB7G1065	GU10	7W	6500K	504 lm	50x55 mm